

## Datasheet ASN485



ASN485 is a high load and high-temperature composite bearing material. It features continuously wound high-strength fibres encapsulated in an internally lubricated, high-temperature filled epoxy resin. ASN485 delivers great impact resistance, excellent chemical resistance, low friction and great anti-wear properties.


### Application

### Material

Synthetic fiber with epoxy resin with friction modifiers.

### Availability

	Value	Unit
Tube inside diameter	on request	
Tube outside diameter	on request	
Length standard	on request	
Inside diameter	on request	
Outside diameter	on request	
Flange diameter	on request	
Flange height	on request	
Total length	on request	

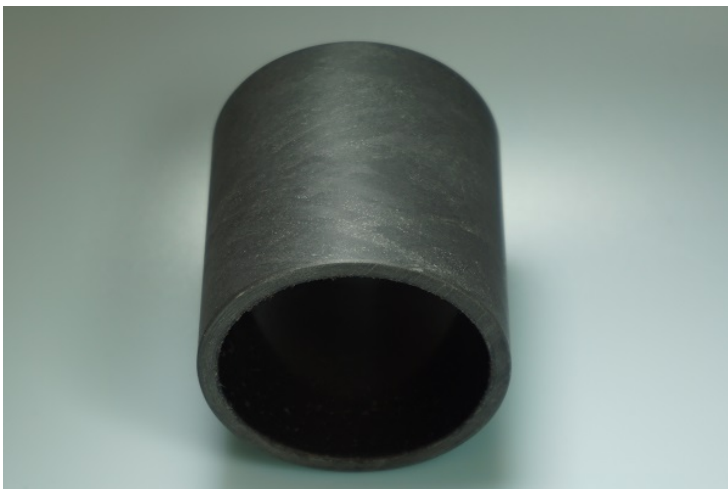

## ASN485 - Specifications

### Physical properties

	Test standard	Value	Unit
Density		1,90	g/cm <sup>3</sup>

### Mechanical properties

	Test standard	Value	Unit
Compressive strength static		on request	
Module of elasticity - Youngs modulus		on request	
Tensile strength		on request	
Shear strength		on request	
Impact strength		on request	
Hardness		on request	
Dynamic load capacity		210	MPa

### Thermal properties

	Test standard	Value	Unit
Thermal expansion Parallel to laminate		on request	
Thermal expansion Normal to laminate		on request	
Min. working temperature		on request	
Max. working temperature		196	°C
Intermittent working temperature		on request	

### Friction properties

	Test standard	Value	Unit
Coefficient of friction dynamic		on request	
Max. sliding speed		on request	
Max. Pv-load dry		on request	
Max. Pv-load oil lubricated		on request	
Max. Pv-load on regular greased		on request	

### Electrical properties

	Test standard	Value	Unit
--	---------------	-------	------