


## Datasheet ASSPFW

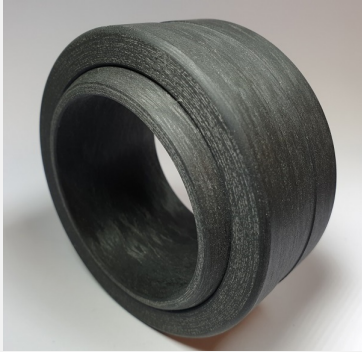

ASEC SP spherical plain bearings are well suited for all rotating pivot points, in particular for oscillating movements, where the shaft must be self-aligning. Spherical plain bearings are for example particularly recommended for the eyes of hydraulic cylinders. As cylinders are always oscillating, they must be able to move freely without any sideload on the rod at any time during the movement. A sideload causes an axial load on the guide and seals of the piston rod, which can lead to leakages. The parallel movement of the cylinder and the spherical plain bearing prevent such leakage.

### Application

High end spherical slide bearing - Stailess steel spherical ball - Interchangeable with other types - Sizes according ISO 12240 - High load and shock resistant - Environmental friendly - Suitable for dry running - Low friction material - Suitable for edge loading - High wear resistance

### Material

Complete composite inner and outer ring.

### Availability

	Value	Unit
Tube inside diameter	15-400	mm
Tube outside diameter	26-550	mm
Length standard	12-230	mm



## ASSPFW - Specifications

### Physical properties

	Test standard	Value	Unit
Density		Not applicable	
Max. swell in water at 20 °C	ASTM D570	<0,1	%

### Mechanical properties

	Test standard	Value	Unit
--	---------------	-------	------

### Thermal properties

	Test standard	Value	Unit
Min. working temperature		-196	°C
Max. working temperature		120	°C
Intermittent working temperature		140	°C

### Friction properties

	Test standard	Value	Unit
Coefficient of friction dynamic	pin-on-ring/dry against steel	0,05-0,22	[-]
Max. sliding speed		2,0	m/s
Max. Pv-load dry	pin-on-ring	0,25	MPa*m/s
Max. Pv-load oil lubricated	pin-on-ring	0,5	MPa*m/s
Max. Pv-load on regular greased	pin-on-ring	2	MPa*m/s

### Electrical properties

	Test standard	Value	Unit
--	---------------	-------	------